

Hexa Band GSM Flexible Antenna (850 / 900 / 1800 / 1900 MHz)

TECHNICAL DATA SHEET

07-18-003-01A


Specifications:

• Frequency	850/900/1800/1900 /2100 MHz
• Gain	≥ 2 dBi
• V.S.W.R.	$\leq 2:1$
• Polarization	Linear
• Radiation Pattern	Omni
• Connector	UFL
• Antenna Cable Length	100mm
• Impedance	50 Ω
• Operation Temperature	-20°C ~60°C
• Storage Temperature	-30°C ~75°C
• Dimension(mm)	21 x 71x0.12
• Weight	3g

Model:



Return loss:

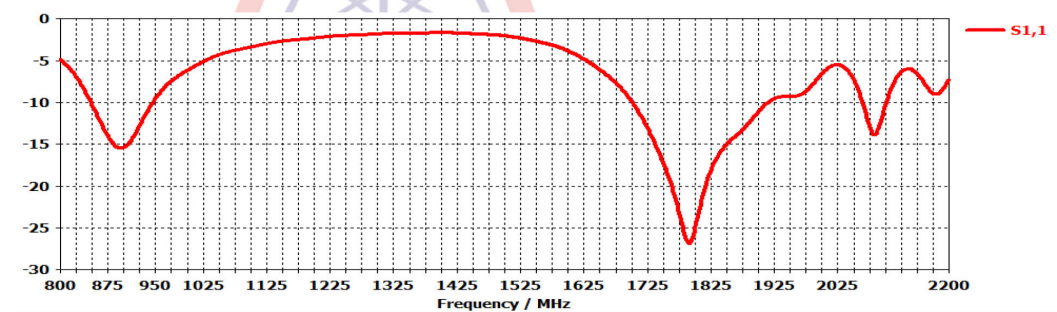

ASTHRA PROJECTS


#LIG- B329, Near old HMTV, Dr.A.S.Rao Nagar,
ECIL Post, Hyderabad-500062. Ph: 040-40264887
Mail: info@asthraprojects.com
Web: www.asthraprojects.com

Hexa Band GSM Flexible Antenna (850 / 900 / 1800 / 1900 MHz)


TECHNICAL DATA SHEET

07-18-003-01A

VSWR:

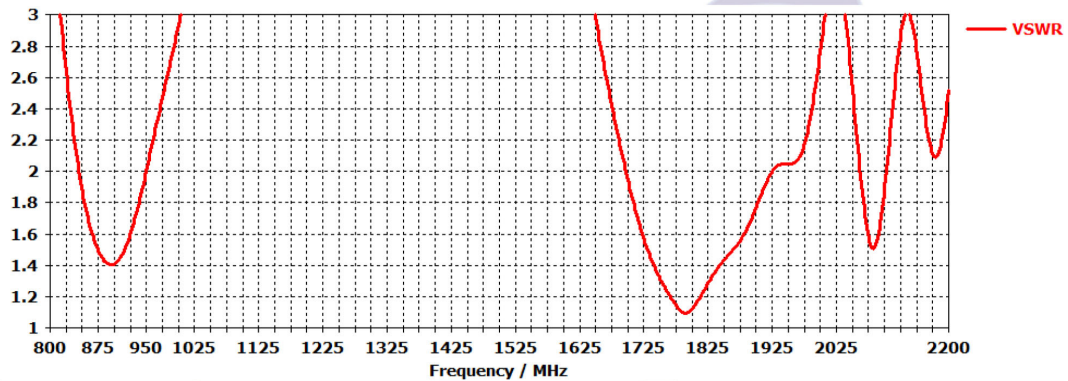

Peak gain (dBi):

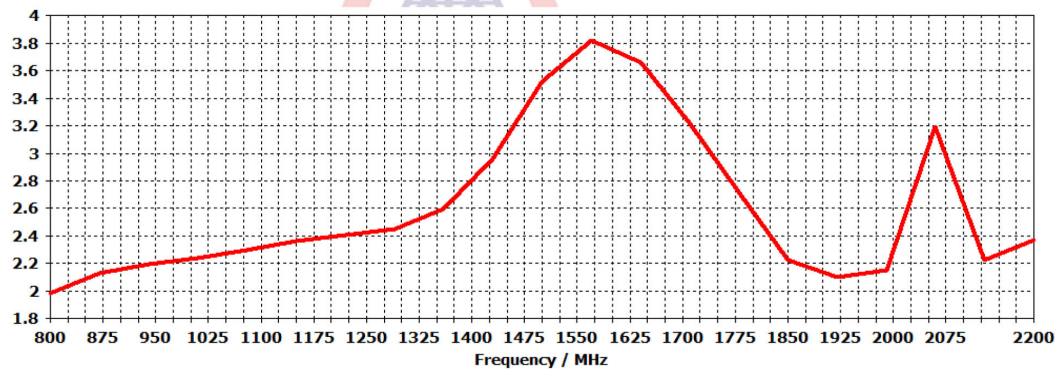

*Note: . Specifications & Dimensions may vary as per the requirements

ASTHRA PROJECTS

#LIG- B329, Near old HMTV, Dr.A.S.Rao Nagar,
ECIL Post, Hyderabad-500062. Ph: 040-40264887
Mail: info@asthraprojects.com
Web: www.asthraprojects.com


Hexa Band GSM Flexible Antenna (850 / 900 / 1800 / 1900 MHz)

TECHNICAL DATA SHEET


07-18-003-01A

Radiation Pattern


XY Plane

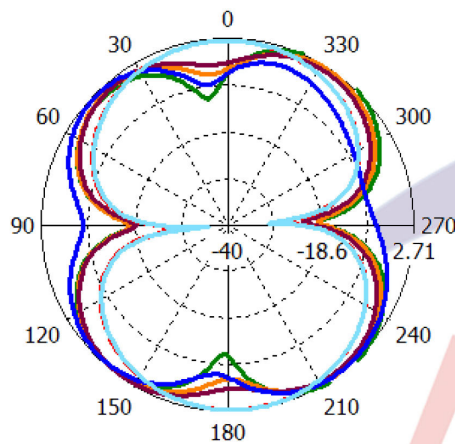

XZ plane

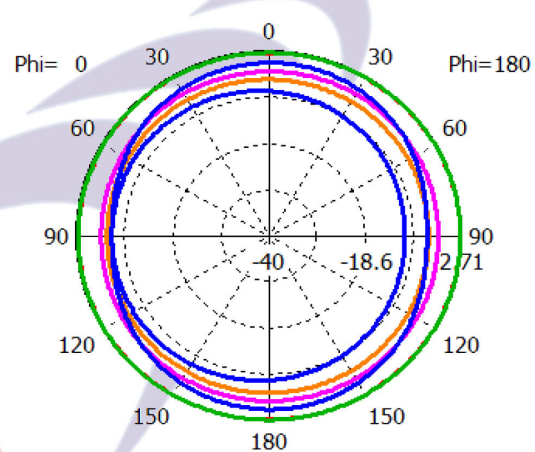

YZ Plane

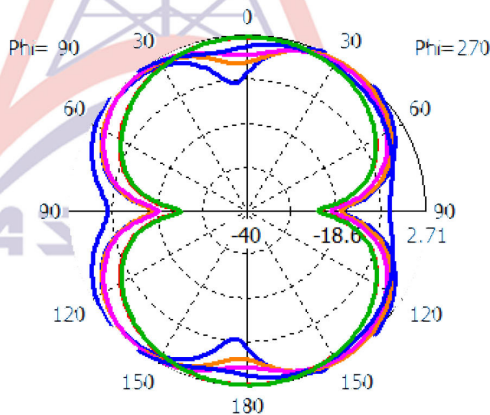

*Note: . Specifications & Dimensions may vary as per the requirements

ASTHRA PROJECTS

#LIG- B329, Near old HMTV, Dr.A.S.Rao Nagar,
ECIL Post, Hyderabad-500062. Ph: 040-40264887
Mail: info@asthraprojects.com
Web: www.asthraprojects.com